



<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 1
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

Concorde Glass Ltd.,  
Linx House,  
104 Waterloo Rd,  
Mablethorpe,  
LN12 1LE,  
UK.

## Glassloc Juliette Balcony Fixing Data Side Fix

Analysis By	Checked By
A.N & R.F. & CC	C.K

0	15/04/2024	T.S.	Issued
<b>Revision</b>	<b>Date</b>	<b>Issued By</b>	<b>Comment</b>



<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 2
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

**Contents**

**Introduction/Actions/Assumptions/Result Summary: ..... 3**

Introduction:..... 3

Actions: ..... 3

Assumption:..... 3

Result Summary:..... 3

**Glass Strength..... 4**

    Balustrade Loading: ..... 4

    Wind Loading:..... 4

**Glassloc Juliette – Side Fix Connections: ..... 5**

    Sketch of System: ..... 5

    Connection to Concrete Design - Side Fixed – Span of 2000mm: ..... 7

    Connection To Mild Steel Baseplate - Side Fixed – Span of 2000mm:..... 8

    Connection To Timber - Side Fixed – Span of 2000mm: ..... 9

    Connection To Aluminium window frame - Side Fixed – Span of 2000mm:..... 10

**Glass Analysis for Span of 2000mm – Glassloc Juliette: .....11**

**Appendix A – Timco Timber Screws Specification Sheet.....18**

**Appendix B – Index Screws Specification Sheet .....21**

**Appendix C - Fischer Reports .....24**

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 3
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

## Introduction/Actions/Assumptions/Result Summary:

### Introduction:

TSA was instructed by Concorde Glass Ltd to provide the below Calculations:

- 1- Provide fixing details for side-fix connections from GLASSLOC JULIETTE to concrete, steel, aluminium, and timber for a span of 2000mm.
- 2- Provide a glass analysis for the GLASSLOC JULIETTE for a span of 2000mm.

### Actions:

Balustrade load = 0.74kN (Table NA.6 IS1991-1-1:2002)

Point load = 0.5kN (Table NA.5 IS1991-1-1:2002)

Typical High Wind load = 2.5kN/m<sup>2</sup>

### Assumption:

Concrete Grade = C30/37

Bolts are grade 8.8 Mild Steel.

Timber Grade = C16 (minimum)

### Result Summary:

#### A. Side Fix Glassloc Juliette:

##### C1. For Span of 2000mm:

- 1- **Connection to Concrete:** Use 1No. Ultracut FBS II 8×70 20/5 Zinc Plated Steel Fischer Concrete screws@200mm C/C with Minimum Embedment depth is 40mm and Minimum edge distance is 50mm.
- 2- **Connection to Steel:** Use M8 Grade 8.8 bolts @200mm C/C.
- 3- **Connection to Timber:** Use M8×40mm Timco Coach Wood Screws @200mm C/C.
- 4- **Connection to Aluminium:** Use M5.5 ABR Index Screws or similar @200mm C/C.
- 5- **Glassloc Juliette Glass Panel 3:** 1100mm (H) × 2000mm (W) × 21.52mm Toughened Laminated Glass Panels with EVA Interlayers.

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 4
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

## Glass Strength

### Balustrade Loading:

< 5mins duration =>  $k_{mod} = 0.77$

$$f_{gd} = (k_{mod})(k_{sp})(f_{gk}) / \gamma_{ma} + k_v(f_{bk} - f_{gk}) / \gamma_{mv}$$

$$f_{gd} = (0.77)(1.0)(45) / 1.6 + 1.0(120 - 45) / 1.2$$

$$f_{gd} = \underline{84.2N/mm^2}$$

### Wind Loading:

10min duration, Multiple Gust Storm =>  $k_{mod} = 0.74$

$$f_{gd} = (k_{mod})(k_{sp})(f_{gk}) / \gamma_{ma} + k_v(f_{bk} - f_{gk}) / \gamma_{mv}$$


$$f_{gd} = (0.74)(1.0)(45) / 1.6 + 1.0(120 - 45) / 1.2$$

$$f_{gd} = \underline{83.3N/mm^2}$$

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 5
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

Glassloc Juliette – Side Fix Connections:





Sketch of System: —

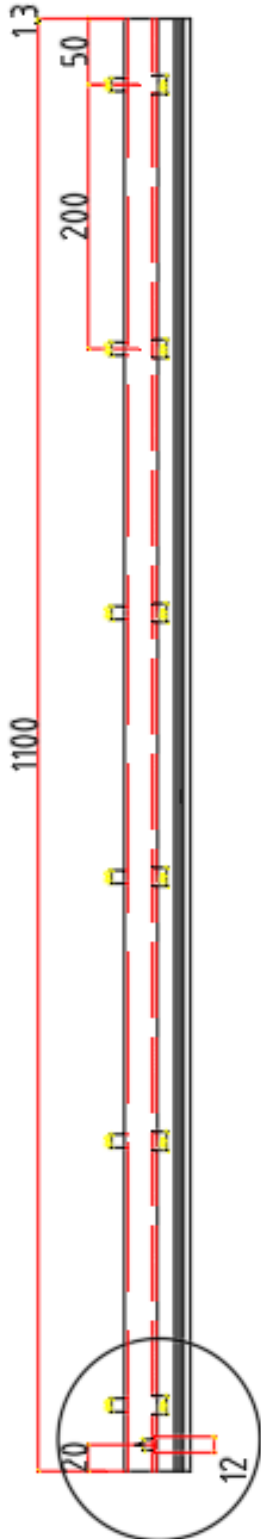



**TSA**  
TED SINGLETON & ASSOCIATES  
CONSULTING ENGINEERS

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 6
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

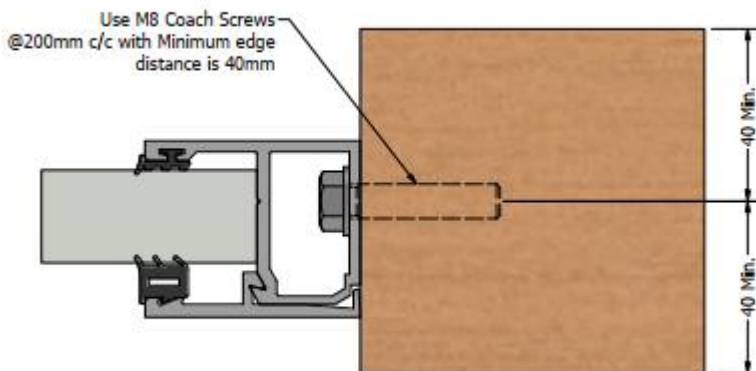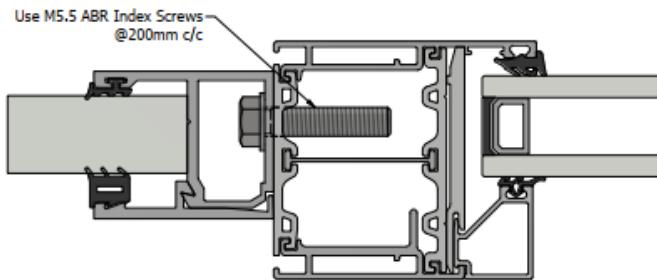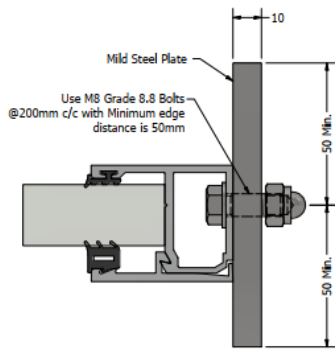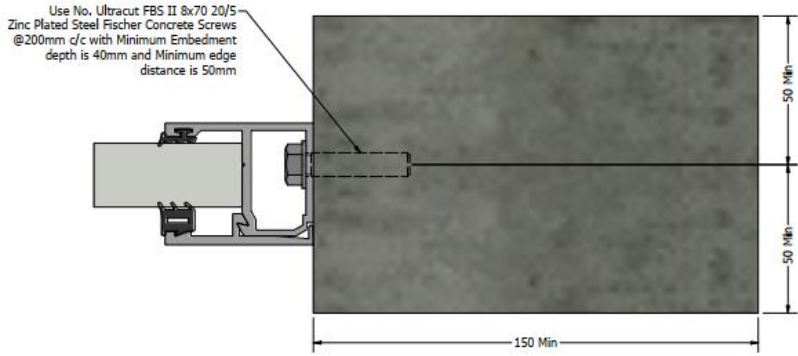

Note: The above sketches are for illustration purposes only.


<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 7
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

Connection to Concrete Design - Side Fixed – Span of 2000mm:


Shear Load due to Balustrade load =  $0.74\text{kN/m} \times 1.5 \times 1\text{m} = 1.11\text{kN}$  (ULS)

Shear Load due to Wind load =  $2.5\text{kN/m}^2 \times 1.5 \times 1\text{m} \times 0.6\text{m} = 2.25\text{kN}$  (ULS) – **Worst Case.**

**Therefore, use 1No. Ultracut FBS II 8x70 20/5 Zinc Plated Steel Fischer Concrete screws@200mm C/C with Minimum Embedment depth is 40mm and Minimum edge distance is 50mm as per the screenshot below.**

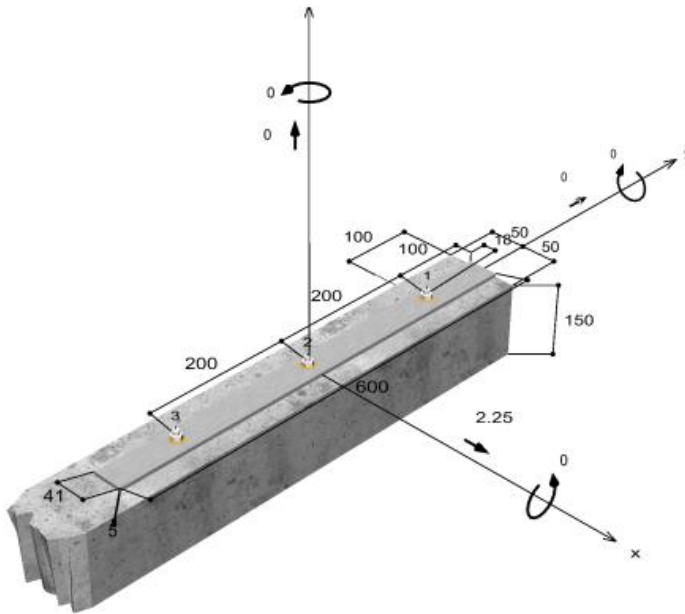

Use No. Ultracut FBS II 8x70 20/5  
Zinc Plated Steel Fischer Concrete Screws  
@200mm c/c with Minimum Embedment  
depth is 40mm and Minimum edge  
distance is 50mm

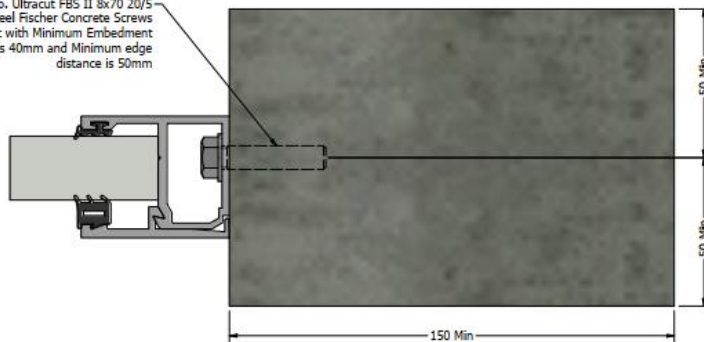

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 8
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

Connection To Mild Steel Baseplate - Side Fixed – Span of 2000mm:

**M8 Grade 8.8 Bolt:**

$$f_y = 640 \text{ MPa} \quad (\text{Grade 8.8 Mild Steel, Table 3.1 EN 1993-1-8:2005})$$

$$f_{ub} = 800 \text{ MPa} \quad (\text{Grade 8.8 Mild Steel, Table 3.1 EN 1993-1-8:2005})$$

$$\alpha = 0.6 \quad (\text{Table 3.4 EN 1993-1-8:2005})$$

$$A = 36.6 \text{ mm}^2 \quad (\text{For M8 Bolts})$$

$$\lambda_{m2} = 1.25 \quad (\text{Table 5.1 EN 1993-1-4:2006})$$

Shear Resistance Check: (Table 3.4 EN 1993-1-8:2005)


$F_{v,Ed}$ : is the design shear force per bolt for the ultimate limit state.

$F_{v,Rd}$ : is the design shear resistance per bolt.

$$F_{V,Ed} = 0.75 \text{ kN}$$

$$F_{V,Rd} = \frac{\alpha F_{ub} A}{\lambda_{m2}} = \frac{0.6 \times 800 \times 36.6}{1.25} \times 10^{-3} = 14.05 \text{ kN} \rightarrow F_{V,Rd} = 14.05 \text{ kN} > 0.75 \text{ kN} \quad \text{Okay}$$

**Therefore, Use M8 Grade 8.8 Bolts @200mm C/C.**

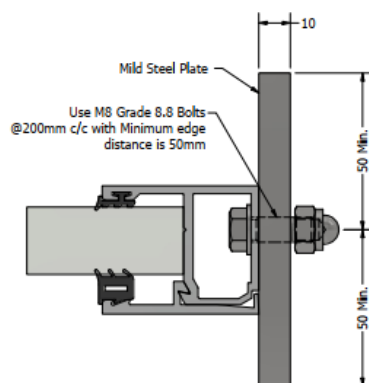



<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 9
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

Connection To Timber - Side Fixed – Span of 2000mm:

**Shear Resistance Check:**


$$\text{Shear Force per screw} = \frac{0.75\text{kN}}{1.5} = 0.5\text{kN}$$

Shear Capacity of M8 Coach Screws = 1.17kN as per BS 5268-2:2002

Therefore, 1.17kN > 0.5kN **Okay**

**Minimum edge distance required is  $5d = 5 \times 8 = 40\text{mm}$ .**

**Therefore, use M8 Coach Screws or similar @200mm C/C.**

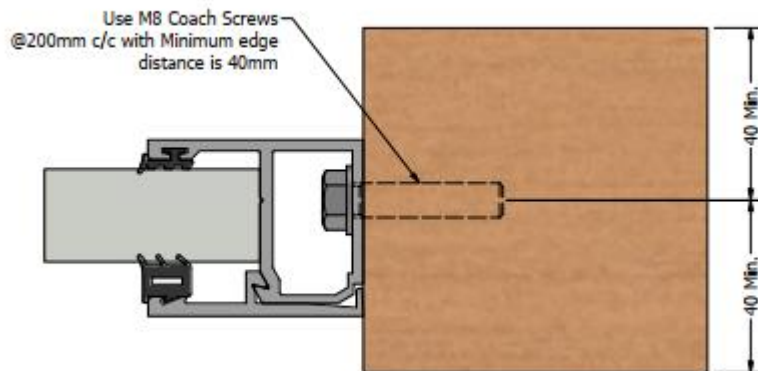

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 10
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

Connection To Aluminium window frame - Side Fixed – Span of 2000mm:


**Shear Resistance Check:**

Shear Force per screw = 0.75kN

Shear Capacity of M5.5 Index Screws =  $\frac{4.82\text{kN}}{2} = 2.41\text{kN}$  as per Datasheet in Appendix B.

Therefore, 2.41kN > 0.75kN **Okay**

**Therefore, use M5.5 ABR Index Screws or similar @200mm C/C.**

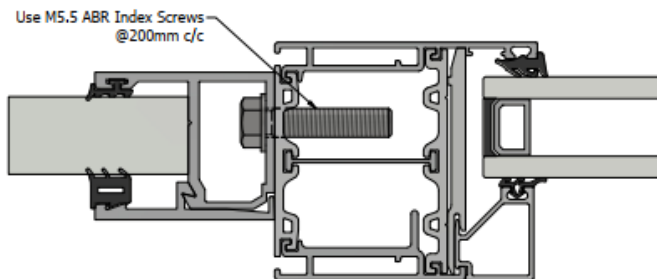



<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 11
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

**Glass Analysis for Span of 2000mm – Glassloc Juliette:**  
**System Sketch:**



<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 12
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC


### Glass Analysis - Bending Stress of Glass Panel due to 2.5kN/m2 Wind Loading:

- Analysis Software was used to determine maximum bending stress of the glass due to 2.5N/m2 Wind Loading.
- 10/10/1.52mm T/L/T Glass analysed, horizontally toughened Laminated.
- Interlayer Properties used for analysis, E= 18MPa, G = 6.82MPa EVA
- Bending Stress analysed based on glass panel of 2000 (l) x 1100 (h) mm.

### Result:

Max. Bending Stress =  $13.29\text{N/mm}^2 \times 1.5 = 19.94\text{N/mm}^2 < 83.3\text{N/mm}^2$

**OK in Bending**

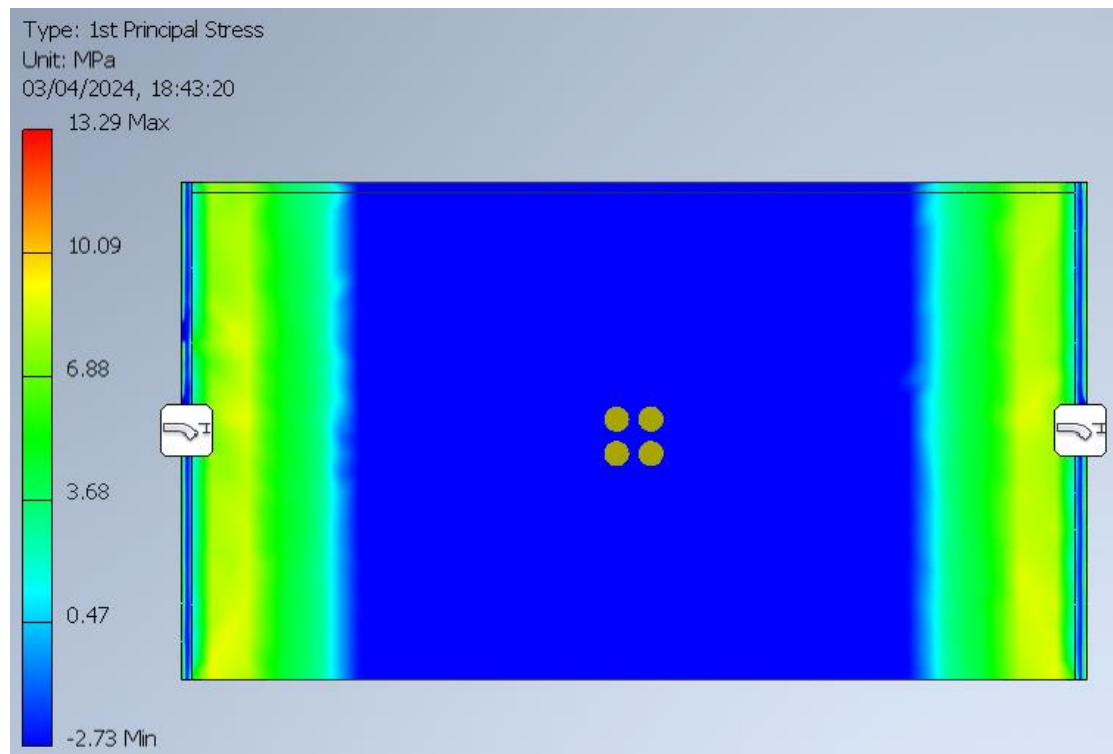

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 13
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC


### Glass Analysis - Deflection of Glass Panel due to 2.5kN/m<sup>2</sup> Wind Loading:

- Analysis Software was used to determine maximum deflection of the glass due to 2.5N/m<sup>2</sup> Wind Loading
- 10/10/1.52mm T/L/T Glass analysed, horizontally toughened Laminated
- Interlayer Properties used for analysis, E= 18MPa, G = 6.82MPa EVA
- Deflection analysed based on glass panel of 2000 (l) x 1100 (h) mm

### Result:

Max. Deflection = 3.326mm < 25mm {BS6180:2011 cl. 6.4.1}

**OK in Deflection (Glass Only)**

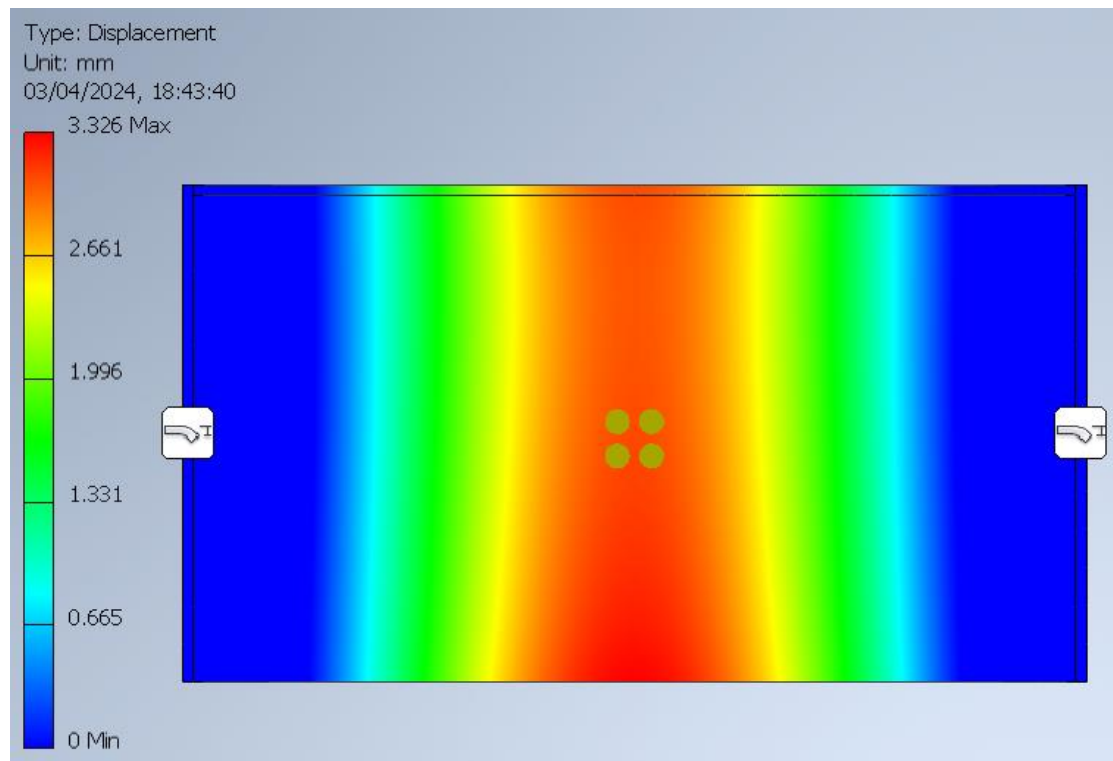

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 14
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC


**Glass Analysis - Bending Stress of Glass Panel due to 0.74kN/m Balustrade Loading:**

- Analysis Software was used to determine maximum bending stress of the glass due to 0.74kN/m Balustrade Loading
- Actual Balustrade Load applied to the glass is 1.48kN (0.74kN/m x 2.0m)
- 10/10/1.52mm T/L/T Glass analysed, horizontally toughened Laminated
- Interlayer Properties used for analysis, E= 18MPa, G = 6.82MPa EVA
- Bending Stress analysed based on glass panel of 2000 (l) x 1100 (h) mm

**Result:**

Max. Bending Stress =  $8.633\text{N/mm}^2 \times 1.5 = 12.95\text{N/mm}^2 < 84.2\text{N/mm}^2$

**OK in Bending**

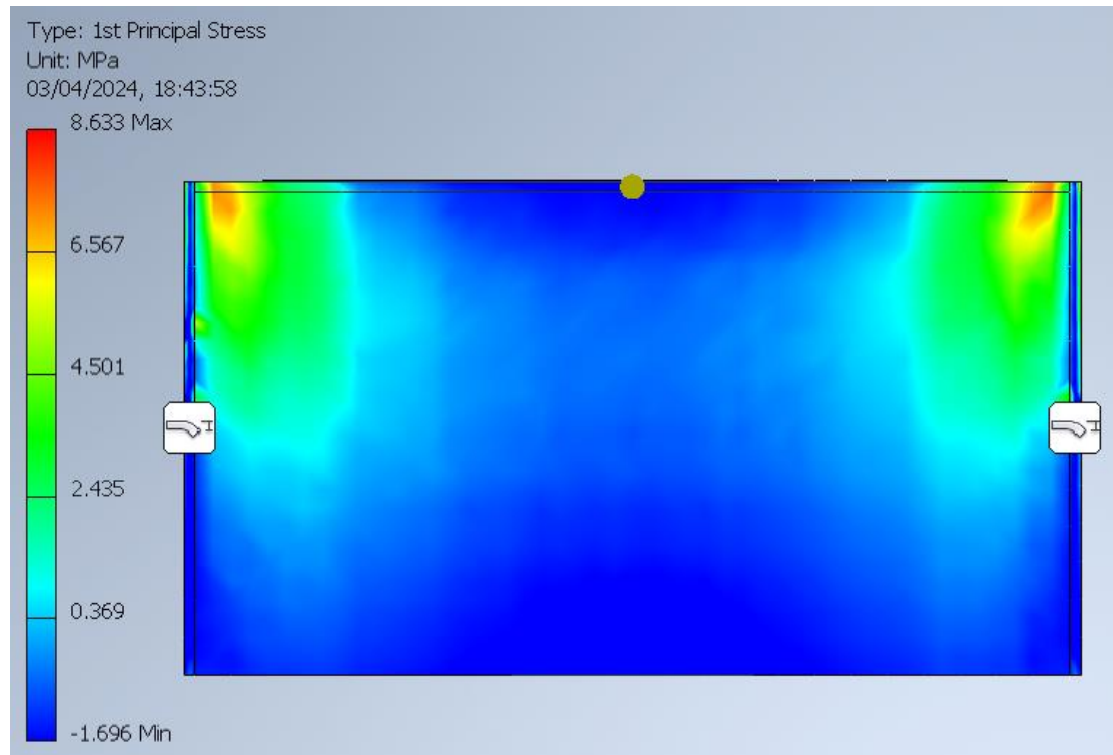

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 15
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC


### Glass Analysis - Deflection of Glass Panel due to 0.74kN/m Balustrade Loading:

- Analysis Software was used to determine maximum deflection of the glass due to 0.74kN/m Balustrade Loading
- Actual Balustrade Load applied to the glass is 1.48kN (0.74kN/m x 2.0m)
- 10/10/1.52mm T/L/T Glass analysed, horizontally toughened Laminated
- Interlayer Properties used for analysis, E= 18MPa, G = 6.82MPa EVA
- Deflection analysed based on glass panel of 2000 (l) x 1100 (h) mm

### Result:

Max. Deflection = 2.298mm < 25mm {BS6180:2011 cl. 6.4.1}

**OK in Deflection (Glass Only)**

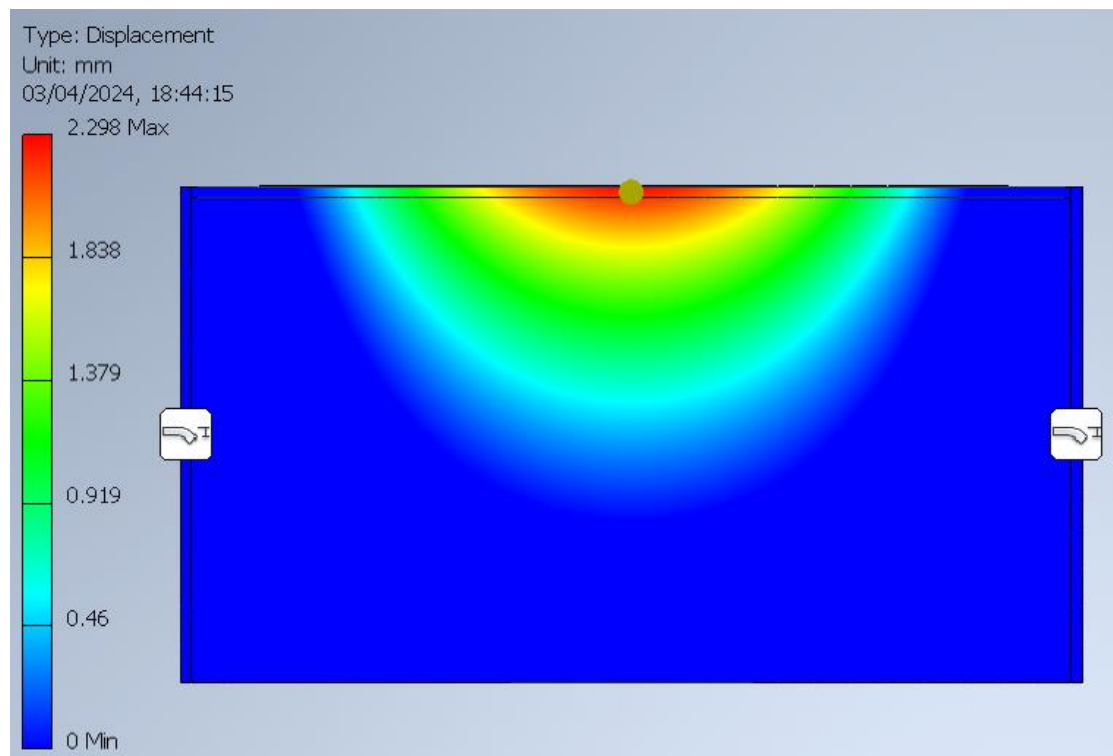

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 16
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC


### Glass Analysis - Bending Stress of Glass Panel due to 0.5kN Point Load:

- Analysis Software was used to determine maximum bending stress of the glass due to 0.5kN Point Load
- 10/10/1.52mm T/L/T Glass analysed, horizontally toughened Laminated
- Interlayer Properties used for analysis, E= 18MPa, G = 6.82MPa EVA
- Bending Stress analysed based on glass panel of 2000 (l) x 1100 (h) mm

### Result:

Max. Bending Stress =  $1.268\text{N/mm}^2 \times 1.5 = 1.91\text{N/mm}^2 < 84.2\text{N/mm}^2$

**OK in Bending**

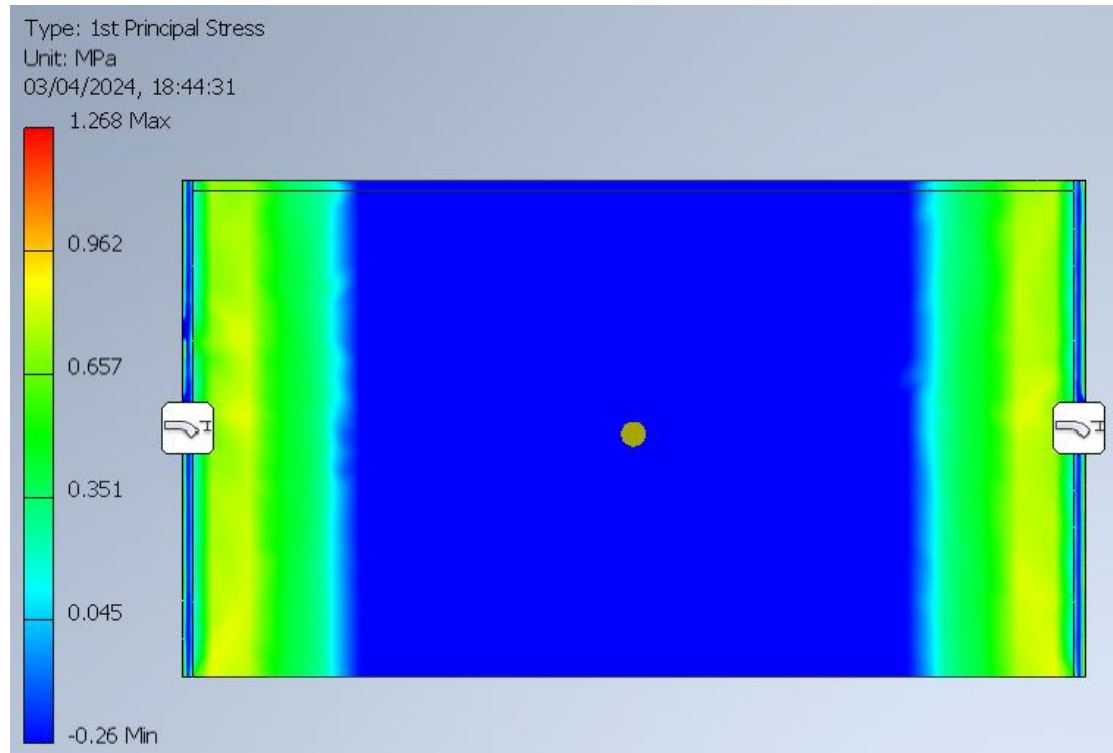



<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 17
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC


### Glass Analysis - Deflection of Glass Panel due to 0.5kN Point Load:

- Analysis Software was used to determine maximum deflection of the glass due to 0.5kN Point Load
- 10/10/1.52mm T/L/T Glass analysed, horizontally toughened Laminated
- Interlayer Properties used for analysis, E= 18MPa, G = 6.82MPa EVA
- Deflection analysed based on glass panel of 2000 (l) x 1100 (h) mm

### Result:

Max. Deflection = 0.3174mm < 25mm {BS6180:2011 cl. 6.4.1}

**OK in Deflection (Glass Only)**

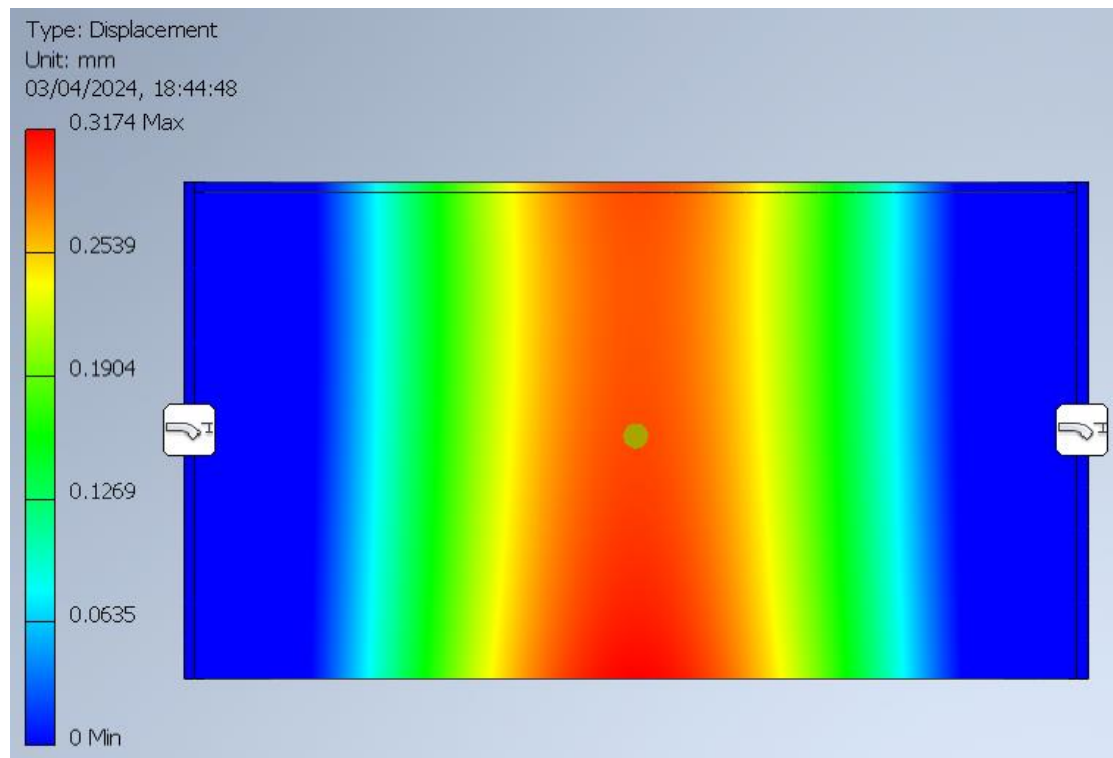



<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 18
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

## Appendix A – Timco Timber Screws Specification Sheet

TSA is Both the Designer and the Specifier of the Fixings.

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 19
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

## TIMco Coach Screws DIN571



### DECLARATION OF PERFORMANCE

DOP7 v2

We here by declare the following designated products  
**TIMco Coach Screws DIN571**  
**Diameter 6.0mm, 8.0mm, 10.0mm, 12.0mm**

Have been tested by the following independant testing organisation:

- Notified Body 1015

Strojirensky Zkusebni Ustav, s.p., Czech Republic

And that they have performed initial type testing under system 3, Annex V of the regulation (EU) no. 305/2011 (Construction Products Regulation), with the reference to the harmonised European standard (hEN) BS EN 14592:2008+A1:2012 (Timber structures - Dowel type fasteners - Requirements) for nails intended for the use in "load bearing timber structures" and produced the calculation/test reports and certificates as listed below;

Certificate Number: E-30-20414-13, E-30-20405-13, E-30-20406-13, E-30-20407-13.

Test Report Number: No. 30-9915/1 to No. 30-9915/4.

Factory Process Control (FPC) has been established by the factory and independently audited by TUV Rheinland UK in accordance with ISO9001:2008.

This declaration of conformity is valid until there is a significant change in the product and declared characteristics. ie. raw material or change in production process.

Signed by:



Name: *Simon Midwood*

Position: *Managing Director*

Date & Location: *29. 07. 2013*  
*TIMco House, CW5 6BJ*

This declaration is the responsibility of the importer

T.I Midwood & Co. Ltd. Green Lane, Wardle, Nantwich, Cheshire, CW5 6BJ





**TSA**  
TED SINGLETON & ASSOCIATES  
CONSULTING ENGINEERS

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 20
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

## Declaration Of Performance

### TIMco Coach Screw DIN571 - Zinc

Size	Nominal diameter d (mm)	Inner thread diameter d1	Total Length L (mm)	Thread Length lg (mm)	Head diameter dh (mm)	Test Report No.	Certificate No.	Characteristic yield moment $M_{y,k}$ (Nmm)		Characteristic withdrawal parameter $f_{ax,k}$ (N/mm <sup>2</sup> )		Characteristic head pull-through parameter $f_{head,k}$ (N/mm <sup>2</sup> )	Characteristic tensile capacity $f_{tens,k}$ (kN)	Characteristic torsional ratio
								Thread Section	Smooth Section	Loading across the fibre	Loading along the fiber			
6 x 25	6.0	4.2	25	15	10.0	No. 30-9915/1	E-30-20414-13	11 166	18 366	16,64	10,45	24,27	9.9	1,87*
6 x 30			30	18										
6 x 40			40	24										
6 x 50			50	30										
6 x 60			60	36										
6 x 65			65	39										
6 x 70			70	42										
6 x 75			75	45										
6 x 80			80	48										
6 x 100			100	60										
8 x 30	8.0	5.6	30	18	13.0	No. 30-9915/2	E-30-20405-13	22 852	41 589	13,91	8,52	22,20	16,21	1,50*
8 x 40			40	24										
8 x 50			50	30										
8 x 60			60	36										
8 x 65			65	39										
8 x 70			70	42										
8 x 75			75	45										
8 x 80			80	48										
8 x 90			90	54										
8 x 100			100	60										
8 x 150	150	90												
10 x 40	10.0	7.0	40	24	17.0	No. 30-9915/3	E-30-20406-13	42 887	89 040	12,47	10,04	22,13	26,45	2,18*
10 x 50			50	30										
10 x 60			60	36										
10 x 70			70	42										
10 x 75			75	45										
10 x 80			80	48										
10 x 100			100	60										
10 x 120			120	72										
10 x 130			130	78										
10 x 150			150	90										
10 x 200	200	120												
12 x 50	12.0	9.0	50	30	19.0	No. 30-9915/4	E-30-20407-13	82 789	147 141	12,24	9,81	21,12	40,37	2,11*
12 x 75			75	45										
12 x 80			80	48										
12 x 100			100	60										
12 x 150			150	90										



<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 21
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

## Appendix B – Index Screws Specification Sheet

TSA is Both the Designer and the Specifier of the Fixings.

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 22
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

## TECHNICAL DATA SHEET



### SELF-DRILLING SCREW FIXINGS

Denomination: SELF-DRILLING SCREW FIXINGS

Codes: ASE, ABEI, ARE, ABR, ABRBLE, NBR, ABRC, ABRC2, ABRA2, ABA, FS, ABP, NBP, ABPC, ABPC2, TAEZ, TAEN, BCPZ, BZPZBL, BCPH, BCPB, BCPAZ, BIE, AUTO, BAUTO, RS.

Reference: FT BRO-en












Date: 30/05/19

Revision: 13

Page: 12 of 23


## 5. ABR, NBR, ABR\_BLE, ABRA2

Self-drilling screw - Dome head - Ph socket

				<p><b>Properties</b></p>  		<p><b>Base material</b></p>  	
<p><b>Coatings</b></p>    				<p><b>Properties</b></p>   			

#### 4.1. Details

Code		ST 3.5	ST 3.9	ST 4.2	ST 4.8	ST 5.5
$d_k$ : head diameter	[mm]	6.9	7.5	8.2	9.5	10.8
k: head thickness	[mm]	2.60	2.80	3.05	3.55	3.95
Ph bit		n° 2	n° 2	n° 2	n° 2	n° 3
R: head radius	[mm]	5.4	5.8	6.2	7.2	8.2
D: exterior thread diameter	[mm]	3.53	3.91	4.22	4.80	5.46
d: interior thread diameter	[mm]	2.64	2.92	3.10	3.58	4.17
p: thread	[mm]	1.3	1.3	1.4	1.6	1.8
l: lengths	[mm]	9.5 - 32	13 - 32	13 - 50	13 - 120	19 - 73
Installation bit code (Ph bit)		PUPHC02 PUPHL02	PUPHC02 PUPHL02	PUPHC02 PUPHL02	PUPHC02 PUPHL02	PUPHC03 PUPHL03
Drill capacity	[mm]	0.70 - 2.25	0.70 - 2.40	1.75 - 3.00	1.75 - 4.40	1.75 - 5.25

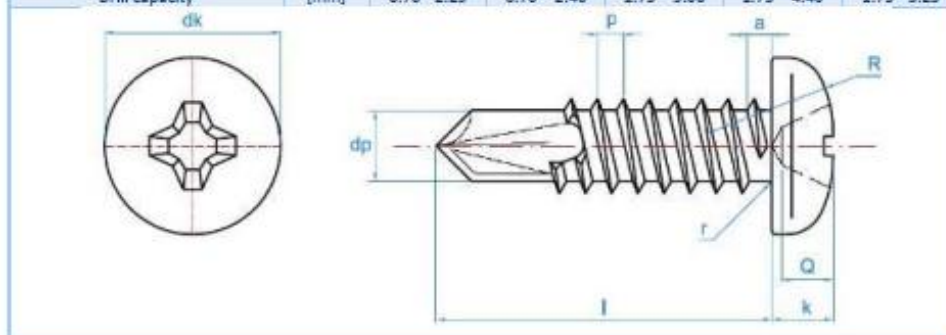

- Zinc-plated (code ABR), white zinc-plated (code ABR\_BLE) and black zinc-plated (code NBR) finishes.
- A2 stainless steel version (code ABRA2) for use exclusively with aluminium (does not produce corrosion by galvanic coupling). Do not use screw in stainless steel to drill steel, as point will burn out due to lack of hardness.

<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 23
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

## TECHNICAL DATA SHEET



### SELF-DRILLING SCREW FIXINGS

Denomination: SELF-DRILLING SCREW FIXINGS

Codes: ABE, ABEI, ARE, ABR, ABRLE, NBR, ABRC, ABRC2, ABRA2, ABA, FS, ABP, NSP, ABPC, ABPC2, TAEZ, TAEN, BCPZ, BZPZBL, BCPN, BCPB, BCPA2, BIE, AUTO, BAUTO, RS.

Reference: FT BRO-en

Date: 30/05/19

Revision: 13

Page: 6 of 23

MAXIMUM THICKNESS TO BE FIXED						
Length	ST 3,5	ST 3,9	ST 4,2	ST 4,8	ST 5,5	ST 6,3
9,5	2,85					
11	4,2					
13	6,2	5,8	4,3	3,7		
16	9,2	8,8	7,3	5,5		
19	12,1	11,7	10,3	8,7	8,7	7
22	15,1	14,7	13,3	11,7	11,7	10
25	18,1	17,7	16,3	14,7	14,7	13
32	25,1	24,5	23	21,5	21,5	20
38		30,5	29	27,5	27,5	26
45			36	34,5	34,5	33
50			41	39,5	39,5	38
60				49,5	49,5	48
63				52,5	52,5	51
73				62,5	62,5	61
75				64,5	64,5	63
80				69,5		68
90				79,5		78
100				89,5		88
110						98
120						108
130						118
140						128

#### SCREW RESISTANCE CHARACTERISTICS\*

SIZE	TENSION [kN]	SHEAR [kN]
ST 2.9	2.62	1.31
ST 3.5	3.81	1.91
ST 3.9	4.64	2.32
ST 4.2	5.26	2.63
ST 4.8	7.11	3.56
ST 5.5	9.63	4.82
ST 6.3	13.36	6.68

1 kN = 100 Kg



<b>Project:</b> Concorde Glass Ltd	<b>Contract:</b> 1983-1
<b>Subject:</b> Glassloc Juliette Balcony Side Fix	<b>Sheet No.</b> 24
<b>Date:</b> 15/04/2024	<b>By:</b> A.N & R.F. & CC

### Appendix C - Fischer Reports

TSA is Both the Designer and the Specifier of the Fixings.





C-FIX 1.122.0.0  
Database version  
2024.3.11.15.56  
Date  
03/04/2024



<b>Client</b> <b>Concorde Glass Ltd.,</b>  Linx House, 104 Waterloo Rd, Mablethorpe, LN12 1LE, UK.	<b>Design Office</b> <b>TSA Consulting Engineers</b> Ted Singleton 4 BLACKWATER HOUSE MALLOW BUSINESS PARK GOULDS HILL MALLOW CO. CORK P51 KC8C Phone: 0868168300 ted@tsaconsulteng.ie tsaconsulteng.ie	<b>MASONRY FIXINGS</b>  Unit 83, Cherry Orchard Industrial Estate Dublin 10 Phone: +353 1 642 6700 Fax: +353 1 626 2197 technical@masonryfixings.ie www.masonryfixings.ie
---	--	---

### Comment

1983-1\_Glassloc Juliette\_Connection to Concrete Design - Side Fixed – Span of 2000mm\_0

## Design Specifications

### Anchor



Anchor system	fischer Concrete screw ULTRACUT FBS II
Anchor	Concrete screw with hexagon head and washer FBS II 8x70 20/5 US TX, zinc plated steel, with filling disc
Calculated anchorage depth	40 mm
Design Data	Anchor design in Concrete according European Technical Assessment ETA-15/0352, Option 1, Issued 05/10/2020



**Geometry / Loads / Scale units**

mm, kN, kNm

**Value of design actions (including partial safety factor for the load)**

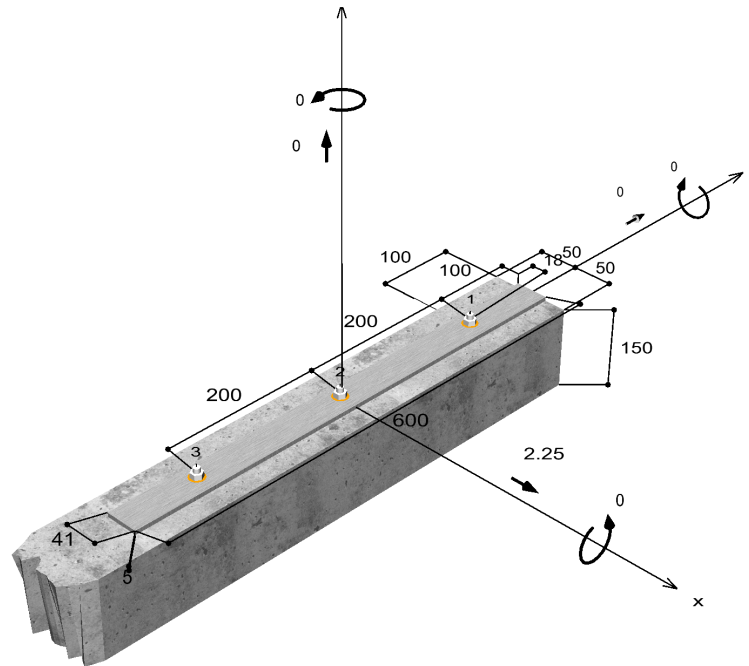

**Not drawn to scale**

**Input data**

Design method	EN 1992-4:2018 mechanical fastener
Base material	C30/37, EN 206
Concrete condition	Cracked, dry hole
Reinforcement	No or standard reinforcement. No edge reinforcement. With reinforcement against splitting
Drilling method	Hammer drilling
Installation type	Push-through installation
Annular gap	Annular gap filled
Type of loading	Permanent-Transient/Static
Base plate location	Base plate flush installed on base material
Base plate geometry	41 mm x 600 mm x 5 mm
Profile type	None


**Design actions \*)**

#	$N_{Ed}$ kN	$V_{Ed,x}$ kN	$V_{Ed,y}$ kN	$M_{Ed,x}$ kNm	$M_{Ed,y}$ kNm	$M_{T,Ed}$ kNm	Type of loading
1	0.00	2.25	0.00	0.00	0.00	0.00	Permanent-Transient/Static

\*) The required partial safety factors for actions are included

## Resulting anchor forces

Anchor no.	Tensile action kN	Shear Action kN	Shear Action x kN	Shear Action y kN
1	0.00	0.75	0.75	0.00
2	0.00	0.75	0.75	0.00
3	0.00	0.75	0.75	0.00



max. concrete compressive strain :  
 max. concrete compressive stress :  
 Resulting tensile actions :  
 Resulting compression actions :

‰  
 N/mm<sup>2</sup>  
 kN , X/Y position ( / )  
 kN , X/Y position ( / )


## Resistance to shear loads

Proof	Action kN	Capacity kN	Utilisation $\beta_v$ %
Steel failure without lever arm *	0.75	8.73	8.6
Concrete pry-out failure	0.75	5.63	13.3
Concrete edge failure	0.75	3.54	21.2

\* Most unfavourable anchor

### Steel failure without lever arm

$$V_{Ed} \leq \frac{V_{Rk,s}}{\gamma_{Ms}} \quad (V_{Rd,s})$$



$$V_{Rk,s} = k_7 \cdot V_{Rk,s}^0 = 1.00 \cdot 13.10 \text{ kN} = 13.10 \text{ kN}$$


Eq. (7.35)/  
(7.36)

$V_{Rk,s}$ kN	$\gamma_{Ms}$	$V_{Rd,s}$ kN	$V_{Ed}$ kN	$\beta_{vs}$ %
13.10	1.50	8.73	0.75	8.6

Anchor no.	$\beta_{vs}$ %	Group N°	Decisive Beta
1	8.6	1	$\beta_{vs,1}$
2	8.6	2	$\beta_{vs,2}$
3	8.6	3	$\beta_{vs,3}$

### Concrete pry-out failure

$$V_{Ed} \leq \frac{V_{Rk,cp}}{\gamma_{Mc}} \quad (V_{Rd,cp})$$



$$V_{Rk,cp} = k_s \cdot N_{Rk,c} = 1 \cdot 8.45kN = 8.45kN$$

Eq. (7.39a)

$$N_{Rk,c} = N_{Rk,c}^0 \cdot \frac{A_{c,N}}{A_{c,N}^0} \cdot \Psi_{s,N} \cdot \Psi_{re,N} \cdot \Psi_{ec,N} \cdot \Psi_{M,N}$$

Eq. (7.1)

$$N_{Rk,c} = 10.67kN \cdot \frac{12,000mm^2}{14,400mm^2} \cdot 0.950 \cdot 1.000 \cdot 1.000 \cdot 1.000 = 8.45kN$$

$$N_{Rk,c}^0 = k_1 \cdot \sqrt{f_{ck}} \cdot h_{ef}^{1.5} = 7.7 \cdot \sqrt{30.0N/mm^2} \cdot (40mm)^{1.5} = 10.67kN$$

Eq. (7.2)

$$\Psi_{s,N} = 0.7 + 0.3 \cdot \frac{c}{c_{cr,N}} = 0.7 + 0.3 \cdot \frac{50mm}{60mm} = 0.950 \leq 1$$

Eq. (7.4)

$$\Psi_{re,N} = 1.000$$

Eq. (7.5)

$$\Psi_{ec,N} = \frac{1}{1 + \frac{2e_p}{s_{cr,N}}} \Rightarrow \Psi_{ec,Nx} \cdot \Psi_{ec,Ny} = 1.000 \cdot 1.000 = 1.000 \leq 1$$

Eq. (7.6)

$$\Psi_{M,N} = 1.00 \geq 1$$


Eq. (7.7)

$V_{Rk,cp}$ kN	$\gamma_{Mc}$	$V_{Rd,cp}$ kN	$V_{Ed}$ kN	$\beta_{V,cp}$ %
8.45	1.50	5.63	0.75	13.3

Anchor no.	$\beta_{V,cp}$ %	Group N°	Decisive Beta
1	13.3	1	$\beta_{V,cp,1}$
2	13.3	2	$\beta_{V,cp,2}$
3	13.3	3	$\beta_{V,cp,3}$

### Concrete edge failure

$$V_{Ed} \leq \frac{V_{Rk,c}}{\gamma_{Mc}} \quad (V_{Rd,c})$$



$$V_{Rk,c} = V_{Rk,c}^0 \cdot \frac{A_{c,V}}{A_{c,V}^0} \cdot \Psi_{s,V} \cdot \Psi_{h,V} \cdot \Psi_{\alpha,V} \cdot \Psi_{ec,V} \cdot \Psi_{re,V}$$

Eq. (7.40)

$$V_{Rk,c} = 5.32kN \cdot \frac{11,250mm^2}{11,250mm^2} \cdot 1.000 \cdot 1.000 \cdot 1.000 \cdot 1.000 \cdot 1.000 = 5.32kN$$

$$V_{Rk,c}^0 = k_9 \cdot d_{nom}^\alpha \cdot l_f^\beta \cdot \sqrt{f_{ck}} \cdot c_1^{1.5}$$

Eq. (7.41)

$$V_{Rk,c}^0 = 1.7 \cdot (8mm)^{0.100} \cdot (50mm)^{0.069} \cdot \sqrt{30.0N/mm^2} \cdot (50mm)^{1.5} = 5.32kN$$

$$\alpha = 0.1 \cdot \sqrt{\frac{l_f}{c_1}} = 0.1 \cdot \sqrt{\frac{50mm}{50mm}} = 0.100 \quad \beta = 0.1 \cdot \left(\frac{d_{nom}}{c_1}\right)^{0.2} = 0.1 \cdot \left(\frac{8mm}{50mm}\right)^{0.2} = 0.069$$

Eq. (7.42/7.43)

The input values and the design results should be checked against local valid standards and approvals. Please respect the disclaimer of warranty in the license agreement of the Software.

$$\Psi_{s,V} = 0.7 + 0.3 \cdot \frac{c_2}{1.5c_1} = 0.7 + 0.3 \cdot \frac{75mm}{1.5 \cdot 50mm} = 1.000 \leq 1 \quad \text{Eq. (7.45)}$$

$$\Psi_{h,V} = \max\left(1; \sqrt{\frac{1.5c_1}{h}}\right) = \max\left(1; \sqrt{\frac{1.5 \cdot 50mm}{150mm}}\right) = 1.000 \geq 1 \quad \text{Eq. (7.46)}$$

$$\Psi_{\alpha,V} = \sqrt{\frac{1}{(\cos \alpha_V)^2 + (0.5 \cdot \sin \alpha_V)^2}} = \sqrt{\frac{1}{(\cos 0.0)^2 + (0.5 \cdot \sin 0.0)^2}} = 1.000 \geq 1 \quad \text{Eq. (7.48)}$$

$$\Psi_{ec,V} = \frac{1}{1 + \frac{2e_s}{3c_1}} = \frac{1}{1 + \frac{2 \cdot 0mm}{3 \cdot 50mm}} = 1.000 \leq 1 \quad \text{Eq. (7.47)}$$

$$\Psi_{re,V} = 1.000$$

$V_{Rk,c}$ kN	$Y_{Mc}$	$V_{Rd,c}$ kN	$V_{Ed}$ kN	$\beta_{V,c}$ %
5.32	1.50	3.54	0.75	21.2

Anchor no.	$\beta_{V,c}$ %	Group N°	Decisive Beta
1	21.2	1	$\beta_{V,c;1}$
2	21.2	2	$\beta_{V,c;2}$
3	21.2	3	$\beta_{V,c;3}$

## Resistance to combined tensile and shear loads

$$\beta_V = \beta_{V,c;1} = 0.21 \leq 1$$



**Proof successful**

## Information concerning the anchor plate

### Base plate details

Plate thickness specified by user without proof

t = 5 mm

Profile type

None

## Technical remarks

The transmission of the anchor loads to the supports of the concrete member shall be shown for the ultimate limit state and the serviceability limit state; for this purpose, the normal verifications shall be carried out under due consideration of the actions introduced by the anchors. For these verifications the additional provisions given in the current design method shall be taken into account.

As a pre-condition the anchor plate is assumed to be flat when subjected to the actions. Therefore, the plate (if present) must be sufficiently stiff. The C-Fix anchor plate design is based on a proof of stresses and does not allow a statement about the stiffness of the plate. The proof of the necessary stiffness is not carried out by C-Fix.

During the design process, the following hints and warnings were issued:

- Filling Washer Required

## Installation data

### Anchor

**Anchor system**      **fischer Concrete screw ULTRACUT FBS II**  
 Anchor      Concrete screw with hexagon head and washer  
                  FBS II 8x70 20/5 US TX,  
                  zinc plated steel, with filling disc

Art.-No. 536852




**Accessories**      FFD 26x12x6  
 Blow-out pump ABG big  
 Quattric II 8/100/165  
 The calculation consists a special washer. With the filling washer it is assured that the gap between plate and anchor is eliminated and the shear load is transferred to every anchor in equal parts.

Art.-No. 538458  
 Art.-No. 567792  
 Art.-No. 549988

### Installation details

Thread diameter      -  
 Drill hole diameter       $d_0 = 8 \text{ mm}$   
 Drill hole depth       $h_2 = 80 \text{ mm}$   
 Calculated anchorage depth       $h_{ef} = 40 \text{ mm}$   
 Installation depth       $h_{nom} = 50 \text{ mm}$   
 Drilling method      Hammer drilling  
 Borehole cleaning      Clear the borehole with a hand blower.  
 Installation type      Push-through installation  
 Annular gap      Annular gap filled  
 Maximum torque      -  
 Socket size      13 mm  
 Base plate thickness       $t = 5 \text{ mm}$   
 Total fixing thickness       $t_{fix} = 11 \text{ mm}$   
 $T_{fix,max}$        $t_{fix,max} = 20 \text{ mm}$

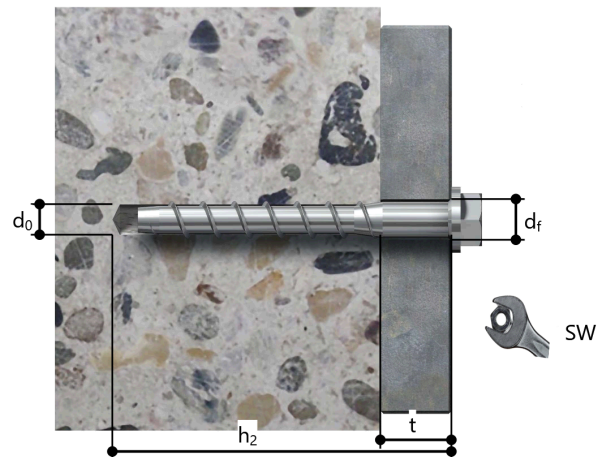

### Base plate details

Base plate material Not available  
 Base plate thickness t = 5 mm  
 Clearance hole in base plate d<sub>f</sub> = 12 mm

### Attachment

Profile type None

### Anchor coordinates

Anchor no.	x mm	y mm
1	-2.5	200
2	-2.5	0
3	-2.5	-200

